
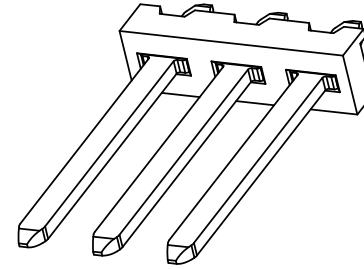
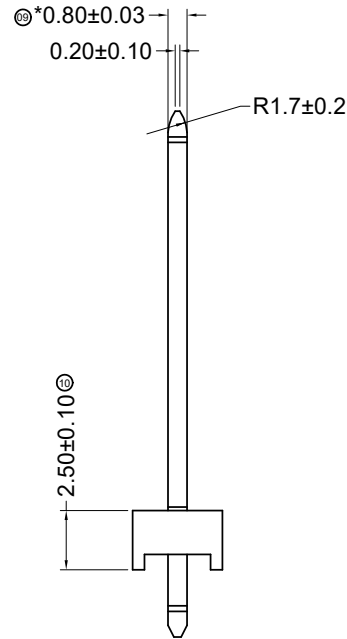
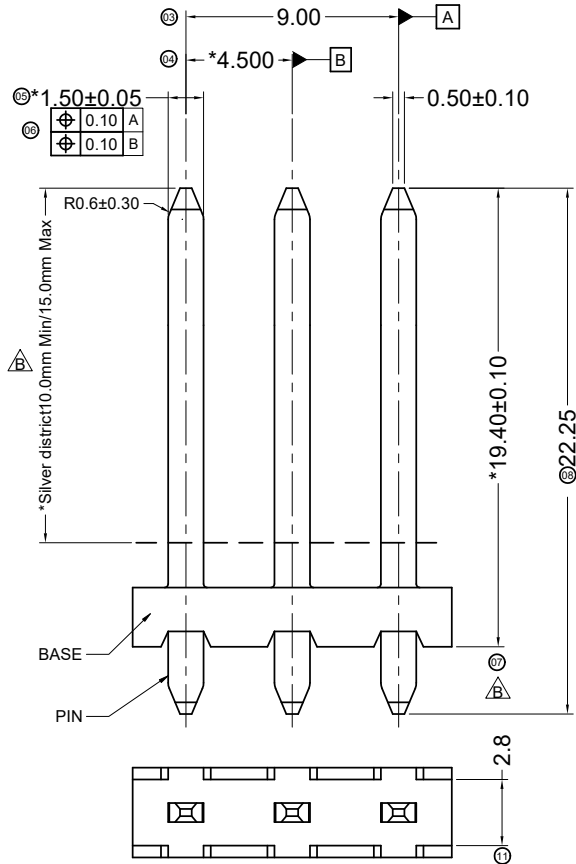


RoHS

This products can apply to the SWB Doc NO. QA-3-04-005 of Environmental&Material Management Rules

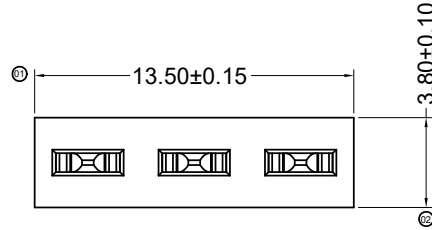

- 1、 ELECTRICAL PROPERTIES:  
CURRENT CARRYING CAPACITY: 600 ma
- 2、 MECHANICAL PROPERTIES:  
PIN PUSHOUT FORCE FROM PLASTIC SOCKET: >=20 N
- 3、 TEMPERATURE PROPERTIES:  
REQUIRED TEMPERATURE WHILE SOLDERING: 270°C FOR 10 SECONDS  
OPERATING TEMPERATURE RANGE: -40°C TO 130°C
- 4、 MATERIAL:  
BASE: PA4T 94V-0 BLACK  
PIN: BRASS 0.80\*1.50mm
- 5、 PLATING:  
UNDERPLATE: 40u" MIN NICKEL  
CONTACT AREA TOPPLATE: 40u" MIN SILVER  
80u"MIN MATTE TIN ON SOLDER TAIL

4500 W V X- 03 X - 4T S40 BK X  
①②③④⑤⑥⑦⑧⑨⑩

- ① Series No
- ② Category: W-Wafer
- ③ Welding Board Angle: V-Straight 180°
- ④ Welding Way: Dip-Blank
- ⑤ Row No.-Pin No: 03- 03Pin
- ⑥ Special No: Blank
- ⑦ Material: 4T-PA4T 94V-0;
- ⑧ Plating Category:: S40-Plating Silver 40u" Min
- ⑨ Color: BK-Black
- ⑩ Packag: R-Reel 、 T-Tary



					GENERAL TOLERANCE				<b>东莞市思索连接器有限公司</b> <b>SWB CONNECTORS CO.,LTD</b>				PART NO. SWB:4500WV-03-4TS40BKT																																									
					.X ±0.30								TITLE																																									
					.XX ±0.20				Pin Header 3Pins 180° connectors																																													
					.XXX ±0.10				UNIT SCALE SHEET REV NUMBER																																													
					X° ±2°				mm 1:1 1/1 A A-000																																													
					PROJECT				APPROVAL				CHECK				DRAWN				DATE																																	
2018/06/19					B					EN20180619003					07号尺寸由19.40±0.15mm 更改为19.40±0.10mm					Alan_qin					Smark					Smark					Joshua					Alan_qin					2017/08/07									
DATE					REV					ECN NO					DESCRIPTION					MODIFY					APPROVAL					PROJECT					APPROVAL					CHECK					DRAWN					DATE				