
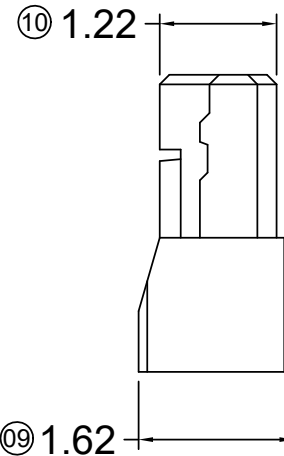
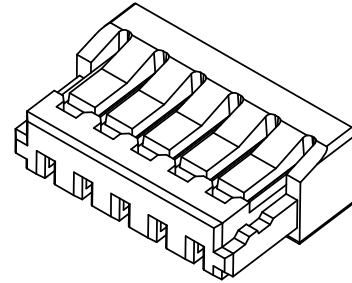
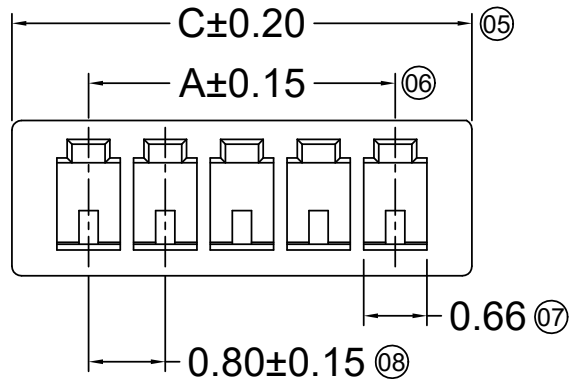
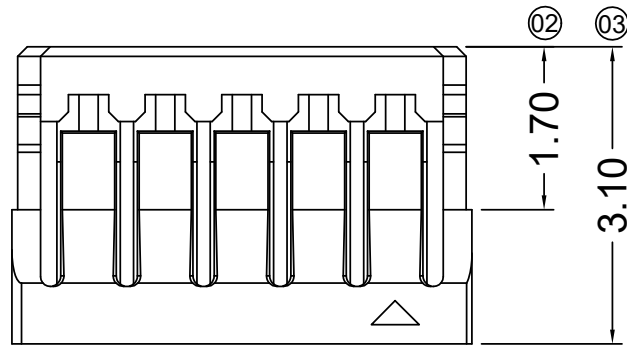


RoHS

This products can apply to the SWB Doc NO. QA-3-04-005 of Environmental&Material Management Rules

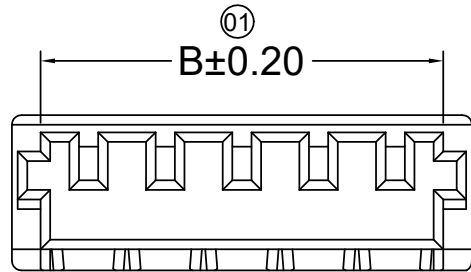

Specifications :

- Voltage rating: 30V AC / DC
- Current rating: 0.50A AC / DC
- Withstanding voltage: 200V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤40mΩ
- Suitable SWB Terminal: 0800T
- Mates With SWB Wafer: 0800W

0800 H X - XX X - 46 XX  
 ① ② ③ ④ ⑤ ⑥ ⑦


- ① Series No.
- ② Category: H-HSG
- ③ Connector type: Blank-ordinary
- ④ Row No.-Pin No per row: XX-Single row
- ⑤ Special No:Blank-Without Ears
- ⑥ Material : 46-PA46 94V-0
- ⑦ Color: Blank-natural GR-Gray

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	0.80	1.80	2.40	12	8.80	9.80	10.40
03	1.60	2.60	3.20	13	9.60	10.60	11.20
04	2.40	3.40	4.00	14	10.40	11.40	12.00
05	3.20	4.20	4.80	15	11.20	12.20	12.80
06	4.00	5.00	5.60	16	12.00	13.00	13.60
07	4.80	5.80	6.40	17	12.80	13.80	14.40
08	5.60	6.60	7.20	18	13.60	14.60	15.20
09	6.40	7.40	8.00	19	14.40	15.40	16.00
10	7.20	8.20	8.80	20	15.20	16.20	16.80
11	8.00	9.00	9.60	22	16.80	17.80	20.40

						GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10 X.° ±2°				东莞市思索连接器有限公司 SWB CONNECTORS CO.,LTD				PART NO. 0800H-XX-46															
						APPROVAL Robing				CHECK YYting				DRAWN sylvia				DATE 2015/06/30				TITLE 0.80mm Crimp Style Commctctors							
2020.5.20	B	EN20200519001	Update Drawing Frame	YYting	Robing	PROJECT				UNIT				SCALE				SHEET				REV				NUMBER			
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL					mm				1:1				1/1				B				A-106			



RoHS

This products can apply to the SWB Doc NO. QA-3-04-005 of Environmental&Material Management Rules



Specifications :

- Voltage rating: 30V AC / DC
- Current rating: 0.50A AC / DC
- Withstanding voltage: 200V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤40mΩ
- Suitable SWB Terminal: 0800T
- Mates With SWB Wafer: 0800W

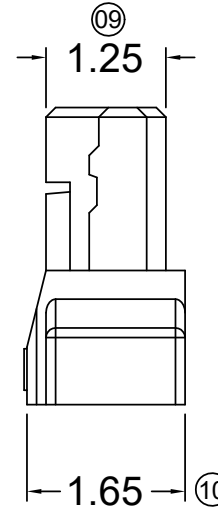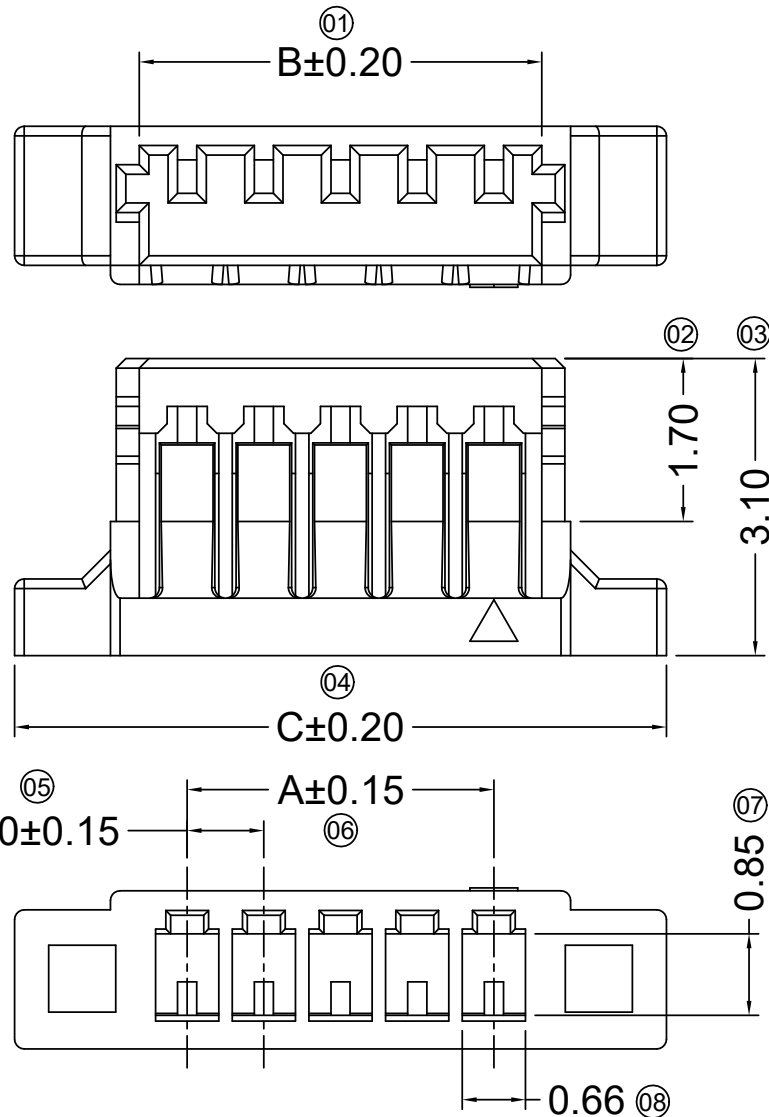

0800 H X - XX E - 46 XX

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Category: H-HSG
- ③ Connector type: Blank-ordinary
- ④ Row No.-Pin No per row: XX-Single row
- ⑤ Special No: E-With Ears
- ⑥ Material : 46-PA46 94V-0
- ⑦ Color: Blank-natural GR-Gray




Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	0.80	1.80	4.40	12	8.80	9.80	12.40
03	1.60	2.60	5.20	13	9.60	10.60	13.20
04	2.40	3.40	6.00	14	10.40	11.40	14.00
05	3.20	4.20	6.80	15	11.20	12.20	14.80
06	4.00	5.00	7.60	16	12.00	13.00	15.60
07	4.80	5.80	8.40	17	12.80	13.80	16.40
08	5.60	6.60	9.20	18	13.60	14.60	17.20
09	6.40	7.40	10.00	19	14.40	15.40	18.00
10	7.20	8.20	10.80	20	15.20	16.20	18.80
11	8.00	9.00	11.60	22	16.80	17.80	20.40

					<p>GENERAL TOLERANCE</p> <p>.X ±0.30</p> <p>.XX ±0.20</p> <p>.XXX ±0.10</p> <p>X.° ±2°</p>				<p>东莞市思索连接器有限公司</p> <p>SWB CONNECTORS CO.,LTD</p>				<p>PART NO.</p> <p>0800H-XXE-46</p>															
					<p>APPROVAL</p> <p>Robing</p>				<p>CHECK</p> <p>YYting</p>				<p>DRAWN</p> <p>sylvia</p>				<p>DATE</p> <p>2015/06/30</p>											
					<p>PROJECT</p> <p>Robing</p>				<p>UNIT</p> <p>mm</p>				<p>SCALE</p> <p>1:1</p>				<p>SHEET</p> <p>1/1</p>				<p>REV</p> <p>B</p>				<p>NUMBER</p> <p>A-022</p>			
2020.5.20	B	EN20200519001	Update Drawing Frame	YYting	Robing																							
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL																							

RoHS

This products can apply to the SWB Doc NO. QA-3-04-005 of Environmental&Material Management Rules

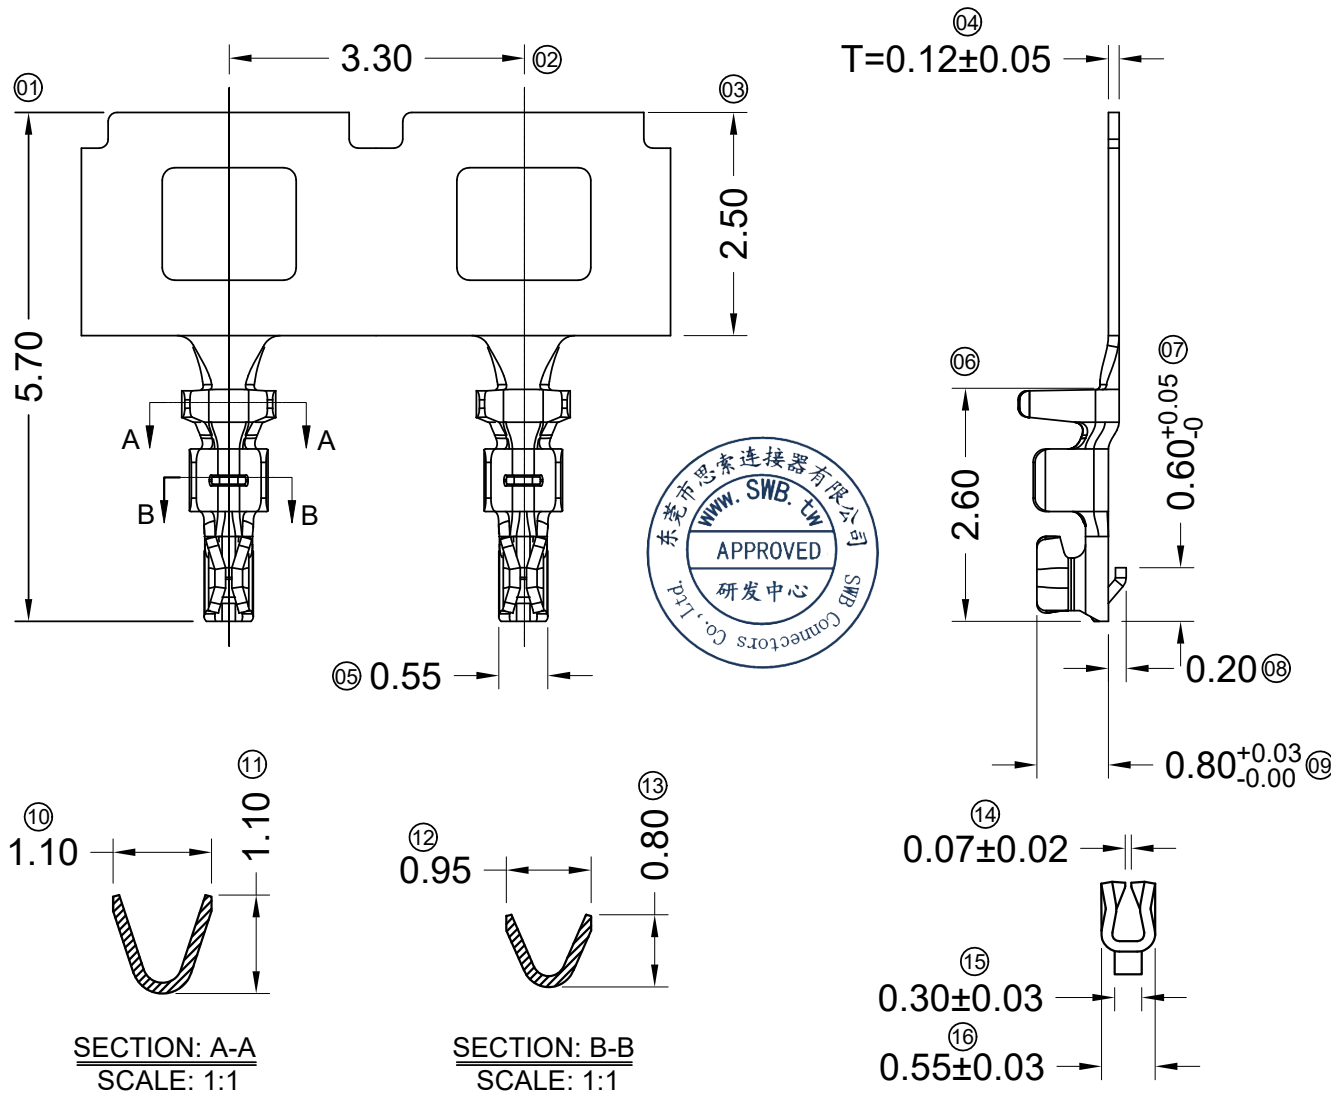

Specifications :

- Voltage rating: 30V AC / DC
- Current rating: 0.5A AC / DC
- Withstanding voltage: 200V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance:≥100MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤40mΩ
- Wire Range:AWG#32、AWG#30
- Insulation O.D:0.60mm(Max)
- Used In SWB Housing:0800H

0800 T X - P XXX X - X  
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No
- ② Category: T-terminal
- ③ Shape: Blank-ordinary
- ④ Material: P-Phosphor bronze
- ⑤ Plating Code: SN-Bright tin plating  
V01-Gold Flash
- ⑥ Plating method:  
Blank-Stamping before plating
- ⑦ Mold No./Mark/Special No.

					GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10 X.° ±2°				东莞市思索连接器有限公司 SWB CONNECTORS CO.,LTD				PART NO. 0800T-PXX																					
					APPROVAL Robing				CHECK YYting				DRAWN Sylvia				DATE 2015/06/30																	
2020.5.25 DATE					c REV					/ ECN NO.					依实物修正图面 DESCRIPTION					YYting MODIFY					Robing APPROVAL					TITLE 0.80mm Crimp Style Connectors				
					PROJECT ① ②					UNIT mm					SCALE 1:1					SHEET 1/1					REV C					NUMBER A-022				

RoHS

This products can apply to the SWB Doc NO. QA-3-04-005 of Environmental&Material Management Rules




- Specifications :
- Voltage rating: 30V AC / DC
  - Current rating: 0.50A AC / DC
  - Withstanding voltage: 200V AC/minute
  - Temperature range: -40°C~+105°C
  - Insulation resistance: ≥100MΩ
  - Contact resistance: ≤20mΩ
  - After environmental testing: ≤40mΩ
  - Material(Pin): Phosphor Bronze
  - Material(Solder Tabs): Phosphor Bronze
  - Mates With SWB Housing: 0800H

0800 W V S - XX X - LP XX XX  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No
- ② Category: W-WAFER
- ③ Connector Type: V-180°
- ④ Mounting Type: S-SMT
- ⑤ Row No.-Pin No.: XX-Single Row
- ⑥ Plug the Pin & Special No.
- ⑦ Material: LP -LCP 94V-0
- ⑧ Plating Code:  
 V01-All Gold Flash  
 SN-Bright Tin Plating
- ⑨ Color : Blank-Natural Color



Recommended P.C.B Layout  
 General Tolerance±0.05

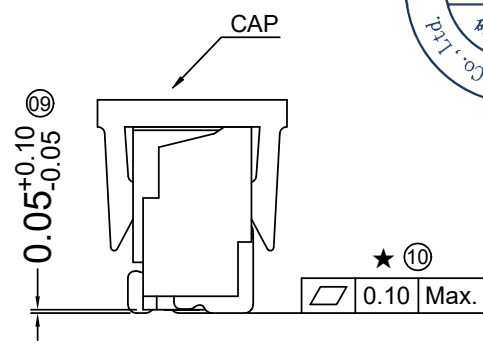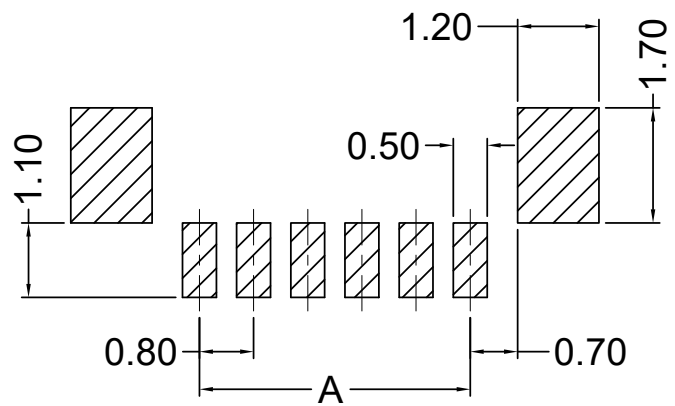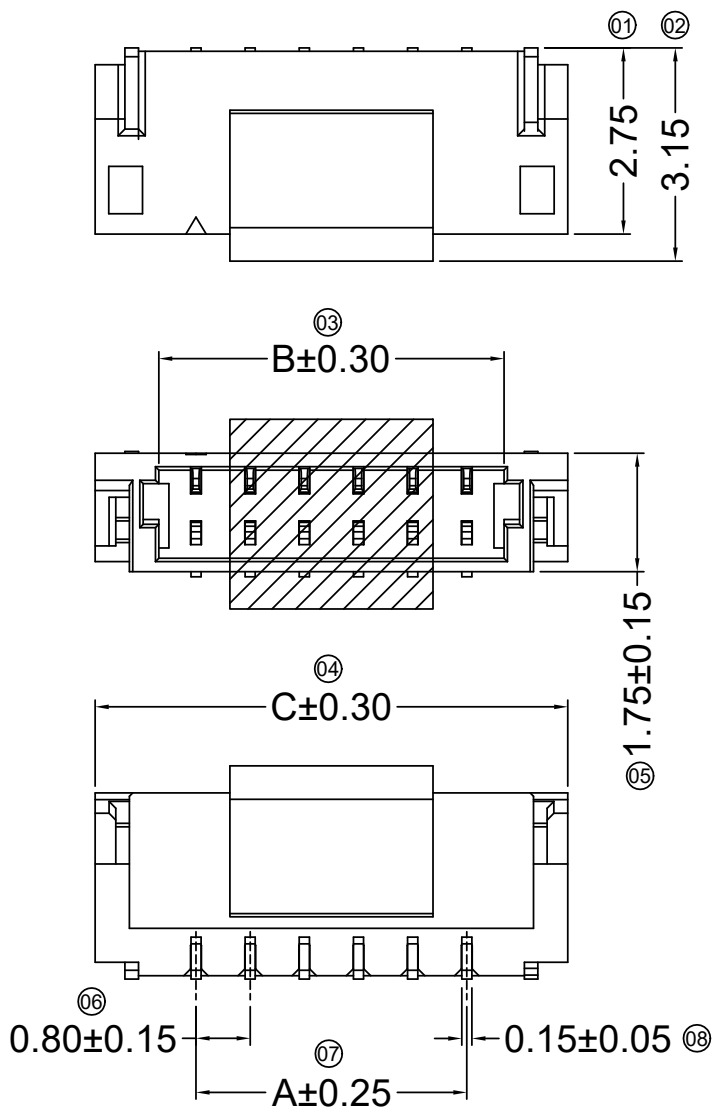


Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
02	0.80	1.90	3.78	12	8.80	9.90	11.78
03	1.60	2.70	4.58	13	9.60	10.70	12.58
04	2.40	3.50	5.38	14	10.40	11.50	13.38
05	3.20	4.30	6.18	15	11.20	12.30	14.18
06	4.00	5.10	6.98	16	12.00	13.10	14.98
07	4.80	5.90	7.78	17	12.80	13.90	15.78
08	5.60	6.70	8.58	18	13.60	14.70	16.58
09	6.40	7.50	9.38	19	14.40	15.50	17.38
10	7.20	8.30	10.18	20	15.20	16.30	18.18
11	8.00	9.10	10.98				

					GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10 X.° ±2°				东莞市思索连接器有限公司 SWB CONNECTORS CO.,LTD				PART NO. 0800WVS-XXHF-LPXX							
					APPROVAL Robing				CHECK YYting				DRAWN Jason				DATE 2017/08/17			
PROJECT Robing										TITLE 0.80 mm IDC Style Connectors										
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL							UNIT	SCALE	SHEET	REV	NUMBER				
2020.5.19	B	EN20200318002	Update Drawing Frame	YYting	Robing							mm	1:1	1/1	B	A-016				





RoHS

本产品符合我司QA-3-04-005  
环境管理物质标准规范

成品工程图



- Specifications :
- Voltage rating: 30V AC / DC
  - Current rating: 0.50A AC / DC
  - Withstanding voltage: 200V AC/minute
  - Temperature range: -40°C~+105°C
  - Insulation resistance: ≥100MΩ
  - Contact resistance: ≤20mΩ
  - After environmental testing: ≤30mΩ
  - Material(Pin): Phosphor Bronze
  - Material(Solder Tabs): Brass
  - Mates With SWB Housing: 0800H

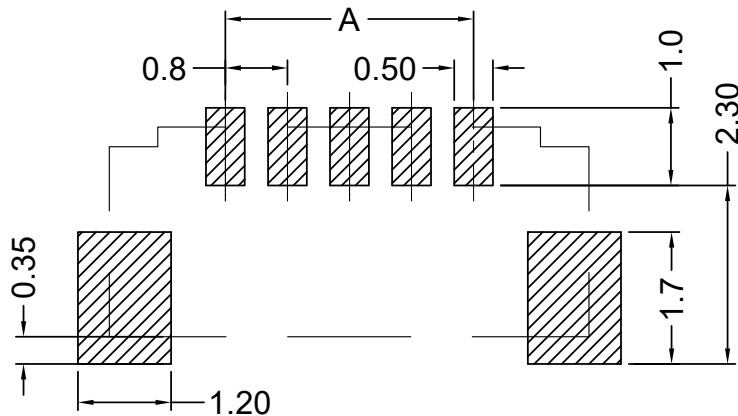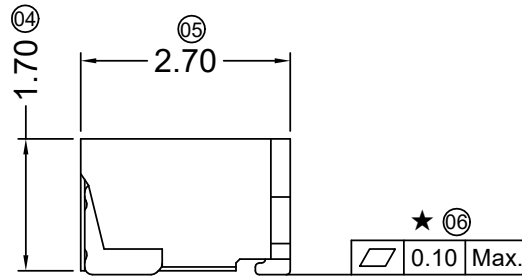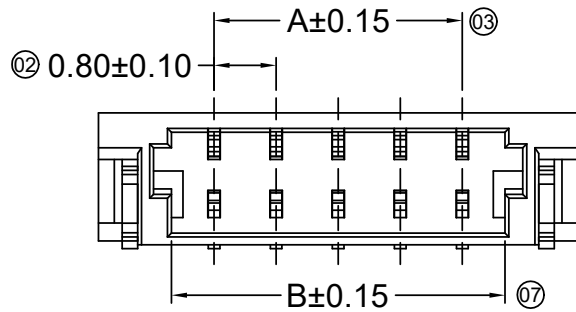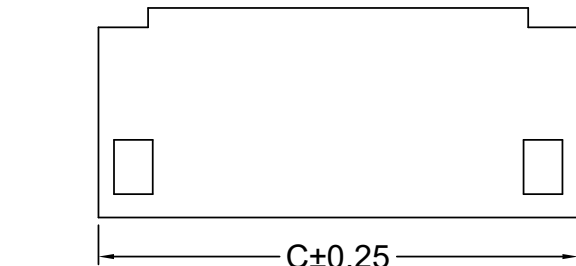

Recommended P.C.B Layout  
General Tolerance±0.05

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	0.80	1.90	3.78	12	8.80	9.90	11.78
03	1.60	2.70	4.58	13	9.60	10.70	12.58
04	2.40	3.50	5.38	14	10.40	11.50	13.38
05	3.20	4.30	6.18	15	11.20	12.30	14.18
06	4.00	5.10	6.98	16	12.00	13.10	14.98
07	4.80	5.90	7.78	17	12.80	13.90	15.78
08	5.60	6.70	8.58	18	13.60	14.70	16.58
09	6.40	7.50	9.38	19	14.40	15.50	17.38
10	7.20	8.30	10.18	20	15.20	16.30	18.18
11	8.00	9.10	10.98				

0800 W R S - XX X - XX XX XX  
① ②③④ ⑤⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Category: W-wafer
- ③ Connector Type:R-90°
- ④ Mounting Type:S-SMT
- ⑤ Row No.-Pin No.XX-Single row
- ⑥ Special No.: HF-Halogen free
- ⑦ Material: LP-LCP 94V-0 ; 4T-PA4T 94V-0
- ⑧ Plating Code: V01:All Gold-Flash ;  
SN-Bright tin plating
- ⑨ Color: Blank-natural color ; BK-black

						东莞市思索连接器有限公司 SWB CONNECTORS CO.,LTD				料号: 0800WRS-XXHF-XXXX				
						核准				名称: 0.80mm IDC Style Connectors				
2020.5.19	F	EN20200519001	更新图框	YYting	Robing	日期								
日期	版次	变更编号	变更内容说明	变更人	核准	Robing	YYting	Jack	2017/03/04					
						核 准				单位 比例 页次 版本 供应商编号				
						Robing				mm 1:1 1/1 F A-172				