
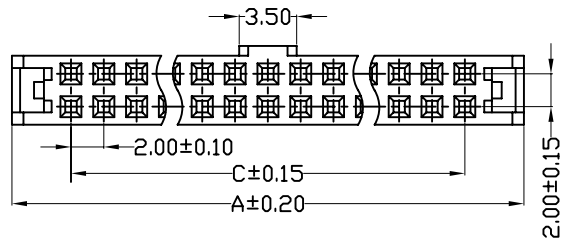

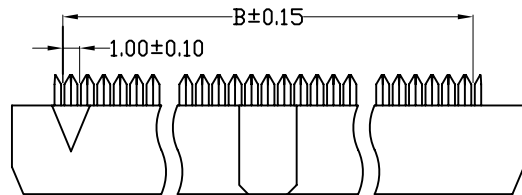

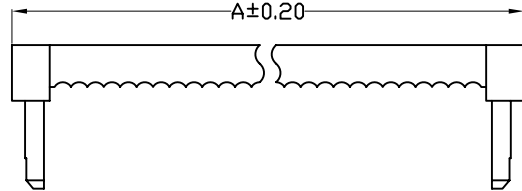



RoHS  Lead-free

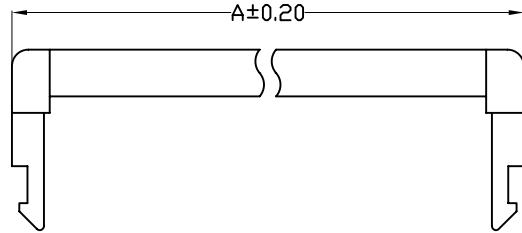

■ Specifications(规格) :

- Voltage rating(额定电压): 250V AC / DC
- Current rating(额定电流): 1A AC / DC
- Withstanding voltage(耐压值): 500V AC/minute
- Temperature range(工作温度): -25°C~+85°C
- Insulation resistance(绝缘电阻): ≥1000MΩ
- Contact resistance(接触电阻): ≤20mΩ
- After environmental testing(环境测试后): ≤30mΩ


2001 H I-2*XX G3X-PT XX

① ② ③ ④ ⑤ ⑥ ⑦

- ① 系列
- ② 类别:
H-HSG
- ③ 外观形态:
I-HSG加五金件组立品
- ④ PIN数或防呆KEY形态:
双排-2*XX
- ⑤ 特殊码:
G3-三合一带凸点 G3G-三合一带凸点镀金
G2-二合一带凸点 G2G-二合一带凸点镀金
- ⑥ 材质:
PT-PBT 94V-0
- ⑦ 颜色:
空码-本色或普通色

Pos.	Dim. A	Dim. B	Dim. C
6	11.20	5.00	4.00
8	13.20	7.00	6.00
10	15.20	9.00	8.00
12	17.20	11.00	10.00
14	19.20	13.00	12.00
16	21.20	15.00	14.00
18	23.20	17.00	16.00
20	25.20	19.00	18.00
22	27.20	21.00	20.00
24	29.20	23.00	22.00
26	31.20	25.00	24.00
28	33.20	27.00	26.00
30	35.20	29.00	28.00
32	37.20	31.00	30.00
34	39.20	33.00	32.00
36	41.20	35.00	34.00
38	43.20	37.00	36.00
40	45.20	39.00	38.00
44	49.20	43.00	42.00
48	53.20	47.00	46.00
50	55.20	49.00	48.00
54	59.20	53.00	52.00
56	61.20	55.00	54.00
60	65.20	59.00	58.00
62	67.20	61.00	60.00
64	69.20	63.00	62.00
68	73.20	67.00	66.00
80	85.20	79.00	78.00

2001HI-2*XXGXG-PT	PBT UL 94V-0	Brass	Contact Area Gold
2001HI-2*XXGX-PT			Tin-Plated
PART NO	Material	Material(Pin)	Finish(Pin)

				GENERAL TOLERANCE				 思索连接器有限公司 SWB CONNECTORS CO.,LTD				PART NO. 2001HI-2*XXGX-PT				
2015/04/24	B	C	Modify the drawing frame format	jian.He	X ±0.30	.XX ±0.20	.XXX ±0.10					TITLE 2.00 mm Crimp Style Connectors				
2011/06/30	A	B	修改图框格式		PROJECT				APPROVAL SUCCESS	CHECK 孙开宝	DRAWN 刘艳	DATA 2007/05/03	UNIT MM	SCALE 1/1	NUMBER A-082	REV C
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL										