

RoHS

本产品符合我司QA-3-04-005
环境管理物质标准规范

包装图



Product 1400PCS
16800mm


Leader Part Empty 40Holes
前空40穴

空22穴

Axes





17544mm

TOP TAPE 200mm
上带200mm

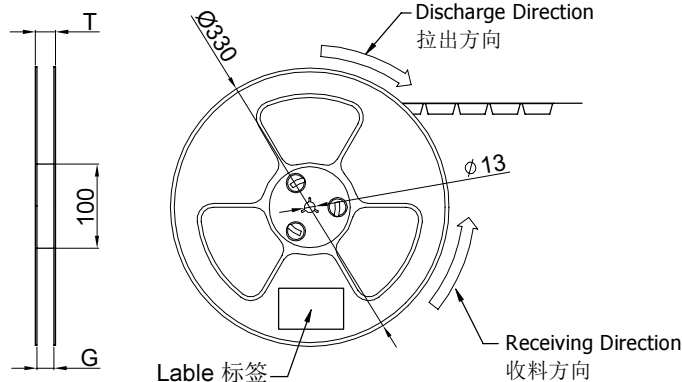

Lable 标签
Single hole: None Hole Side
单孔: 贴无链孔侧
Double hole: Elliptical Hole Side
双孔: 贴椭圆孔侧

COVER TAPE PEEL STRENGTH:30~80g
上带剥离力量:30~80g
速度 PEEL SPEED:300mm/minute

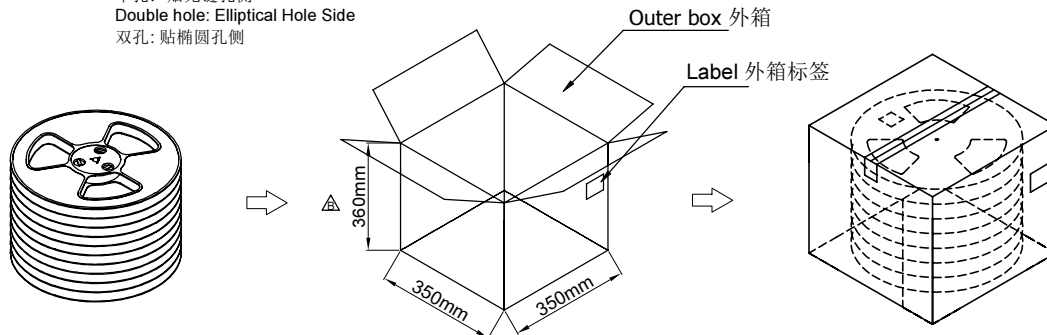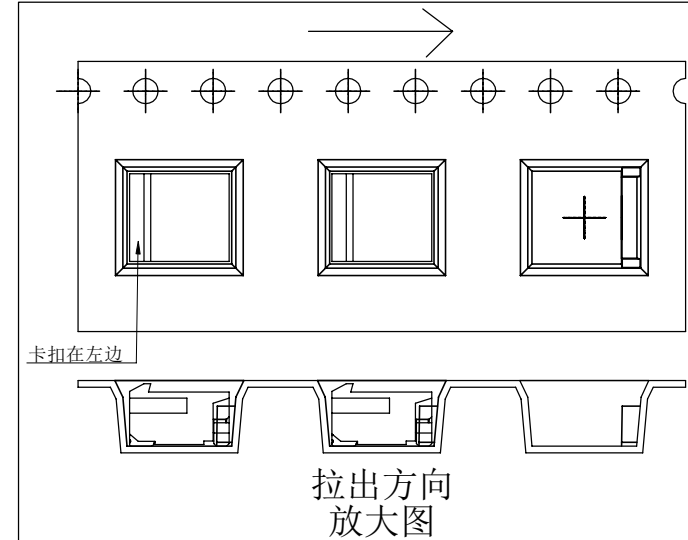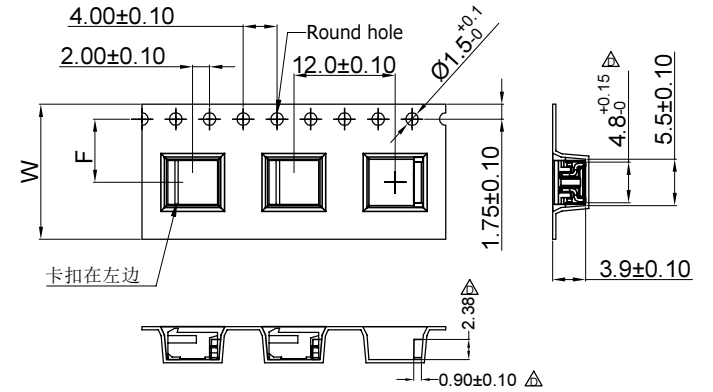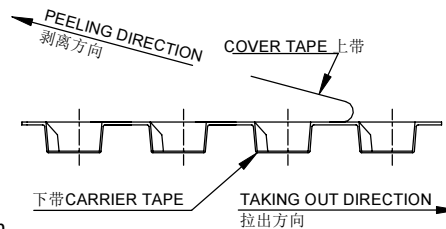

Note:

- Carrier Camber Is Within 1mm In 100mm ; 带长100mm内容许弯曲度1mm
- 10 Sprocket Hole Pitch Cumulative Tolerance±0.2MM ; 圆孔十个孔距离累计允许公差为±0.2mm
- Carrier tape material for PS ; 下带材质为PS材质; Color颜色:Natural透明色
- bracer保护带: Color颜色:Natural透明色, 厚度0.40mm最小
- Thickness=0.30±0.05 ; 材料厚度为0.30±0.05mm
- Carton material纸箱材质:K=K; Carton Thickness纸箱厚度: 6~7mm

ZD1800WRS-02B	Part No.	W	S	F	T (MAX)	G (MAX)	REEL /PCS	CARTON /R	CARTON /PCS
1800WRS-02B-4TSW	ZD1800WRS-02B	16	/	7.50	22.50	16.50	1400	17R	23.8K

2020/09/14	D	EN20200914001	增加防呆	Zeng	Robing
2020/03/17	C	EN20200317003	Update Drawing Frame, The Same ECR And ECN NO.	Zeng	Robing
2016/10/11	B	EN20161011001	修改包装数量由1.5K/R改为1.4K/R	sylvia	Jacky
日期	版次	变更编号	变更内容说明	变更人	核准

一般公差
.X ±0.35
.XX ±0.25
.XXX ±0.15
X° ±0.2°
视角

东莞市思索连接器有限公司
SWB CONNECTORS CO.,LTD

核准: Robing, 审查: Robing, 制作: sylvia, 日期: 2016/04/11

料号: PPN: 1800WRS-02B-4TSW
CPN: ZD1800WRS-02B

名称: 1.80mm Connectors SMT 90° Package

单位	比例	页次	版本	编号
mm	1:1	1/1	D	A-203